



EUROMOLD®

INTERFACE A

Medium Voltage Separable Connectors And Bushings

Catalogue 2026

NEXANS

POWER ACCESSORIES

An essential link in energy systems

The future will be electric. The present already is. As electrification gathers paces, network operators are undertaking large-scale projects to extend and modernize the grids. These projects require a wide range of power accessories. Nexans is a leading manufacturer and distributor in this field since more than 60 years, supplying a full range of power accessories to our global customers in about 100 countries.

We connect all types of cables, for Low High and Medium Voltage installations, and all types of conductors with any cross-section. We provide underground cable junctions, and connect cables to various types of equipment, including transformers and switchgear. Our products are used on both onshore and offshore

networks, on wind and solar farms, or in data centers for example.

Our range of products includes EUROMOLD® connectors, our cutting-edge EPDM technology, known for its exceptional performance and reliability. We also provide Cold- and Heat-Shrinkable joints and terminations, developed to be always easier to install and reliable. We pre-assemble ready to install jumpers. And our extensive range of GPH® ferrules and lugs, designed to meet the highest standards of quality and durability, are embodied in all our accessories kits or delivered separately.

Nexans is committed to delivering innovative solutions and top-notch products in the field of electrical connections and accessories.

Together, we have the power to electrify the future!

Laboratory accreditation


Since June 2000, Nexans independent ELAB laboratory obtained the BELAC accreditation no.144-TEST conform with the European standards for laboratories ISO 17025 for electrical testing of low and medium voltage cable accessories according to the international standards EN 50393, IEC 60502-4, IEC 61442 and HD 629.

ISO Certificate

Since 1992, Nexans commitment to quality and sustainable development is demonstrated by its ISO 9001 and ISO 14001 certifications.



At Nexans, we are proud of our manufacturing and kitting sites

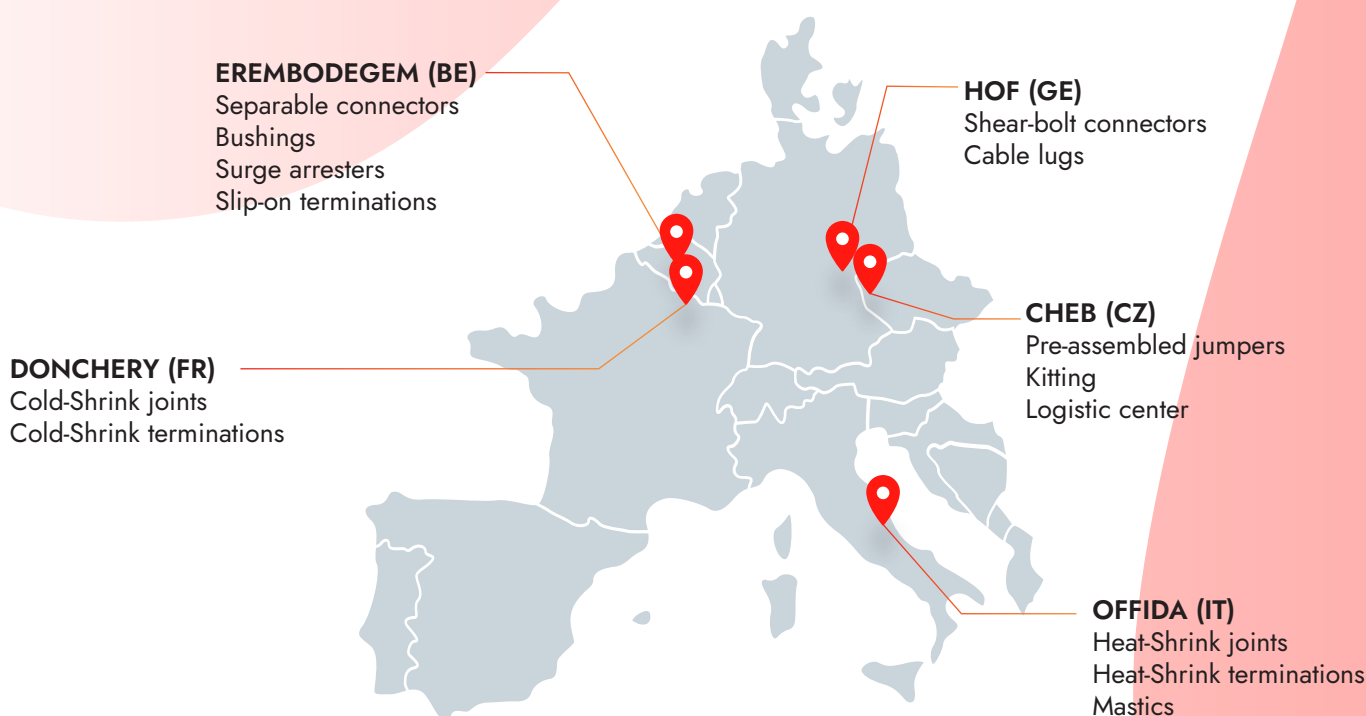

MEDIUM VOLTAGE SEPARABLE CONNECTORS



- Produced in **Europe**
- 100% routine tested
- Only **high-quality material** is used
- Made **100% of EPDM** rubber
- All connectors are tested conform to the **CENELEC HD629.1 standard**. Test reports available upon demand
- Degree of protection **IP67**: dust tight & immersion in water

- A complete range (12 kV - 42 kV)
- For cross sections from **16 mm² to 1200 mm²**
- Temperature range from **-60 °C to +130 °C**
- A range of associated coupling connectors and surge arresters all with compact design
- Maintenance free after correct installation.



Made in Europe since 50 years

EUROMOLD separable connectors are made in Europe using only high-quality material such as EPDM rubber. Each product is tested according to CENELEC standards to ensure long-lasting quality.



Compact & flexible design

The compact design of separable connectors uses less raw material and limits sub packaging. It also facilitates installation in reduced space equipment configuration. The ability to combine connectors for most interfaces offers flexibility in the design of your installation.



Reliable

EUROMOLD connectors have a proven track record of high reliability and performance in medium & low high voltage applications. Each separable connector is made with high quality components in Europe and individually tested before leaving the plant, ensuring a reliable connection.

Easy to install & safe



Make your job easier with Nexans separable connectors. When de-energized, they can easily and safely be installed & removed without specific tools. The high quality EPDM rubber outer jacket ensures a long-lasting protection even in harsh environmental conditions.

All-in-one solution



EUROMOLD's separable connectors are versatile, fitting to a variety of projects with their diverse shapes designed to accommodate a wide range of cross sections. It reduces complexity and minimizes stock requirements, offering solutions for interfaces ranging from A to F.



COMPACT SEPARABLE CONNECTORS


INTERFACE A

TABLE OF CONTENTS

200LR - elbow connector	8
200SR - straight connector	10
240TS - smart tee connector	12
180AR-1 / 2 / 3	14
180A-24P-O	16
PITO-E - plug-in termination	18
Accessories	19
Bail restraints	22
Possible arrangements	23
Other bail restraints	25

INTERFACE A1

Dimensions according to European CENELEC EN 50180 and 50181 (in mm).

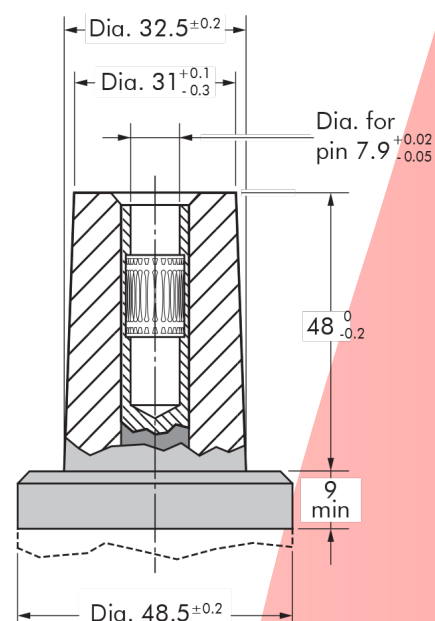


In mm.

While every care is taken to ensure that the information contained in this publication is correct, no legal responsibility can be accepted for any inaccuracy. Nexans Network Solutions N.V. - Div. Euromold reserves the right to alter or modify the characteristics of its products described in this catalogue as standards and technology evolve.

CONNECTING POSSIBILITIES

BUSHINGS / ACCESSORIES / CONNECTOR

Equipment interface	
(K)180AR-1,-2 & -3 Equipment bushing	
(K)180A-24P-O In-air bushing	
(K)150S In-line junction	
(K)200T Tee connector	
(K)200X Cross connector	
K150DP Dead-end plug	
K151SOP Stand-off plug	
250GP Earthing plug	
(K)400RTPA Reducing tap plug	
(K)676RTPA Reducing tap plug	

CONNECTION

- dead-ending of equipment
- two cables to equipment
- three cables to equipment
- one line to equipment
- smart adapter
- one cable to equipment
- in-line junction
- in-line junction + tap-off
- in-line junction + 2 tap-offs
- cable isolation
- cable earthing
- tap-off 630/250 A
- tap-off 1250/250 A

CONNECTORS / ACCESSORIES

	K200DR Dead-end receptacle
	(K)200T Tee connector
	(K)200X Cross connector
	PITO-E Plug-in termination
	KAA4 Smart adapter
	KAA8 Smart adapter
	(K)200SR Straight connector
	(K)200LR Elbow connector
	240TS Smart tee connector

200LR

APPLICATION

Separable elbow connector designed to connect polymeric insulated cable to equipment (transformers, switchgear, motors...).

TECHNICAL CHARACTERISTICS

- A thick conductive EPDM jacket provides a total safe to touch screen.
- Each separable connector is tested for AC withstand and partial discharge prior to leaving the factory.

INTERFACE A ELBOW CONNECTOR




DESIGN

Separable connector comprising:

1. Conductive EPDM insert.
2. Conductive EPDM jacket.
3. Insulating EPDM layer.
4. Type A interface as described by CENELEC EN 50180 and 50181.
5. Conductor contact.
6. Earthing lead.
7. Cable reducer.

The screen break design enables cable outer sheath testing without removing or dismantling the connector.

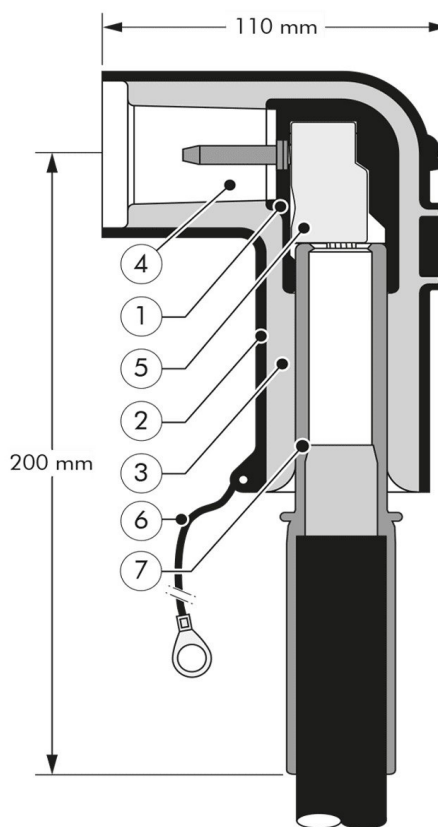

6/10 (12) kV
6.35/11 (12) kV
8.7/15 (17.5) kV
12/20 (24) kV
12.7/22 (24) kV

Up to 24 kV
250 A

EUROMOLD®

SPECIFICATIONS AND STANDARDS


The 200LR separable connector meets the requirements of CENELEC HD 629.1.

Separable connector type	Current I _r (A)	Voltage U _m (kV)	Conductor sizes (mm ²)		Diameter over insulation (mm)	
			min	max	min	max
K200LR-12	250	12 17.5	25 25	95 50	13.0	21.0
K200LR-16	250	17.5 24	50 25	95 95	17.5	25.0

KIT CONTENTS

The complete K200LR elbow connector kit comprises 3x the following components:

The kit also comprises silicone grease, water sealing mastic, gloves, wipers, adhesive tape and installation instructions.

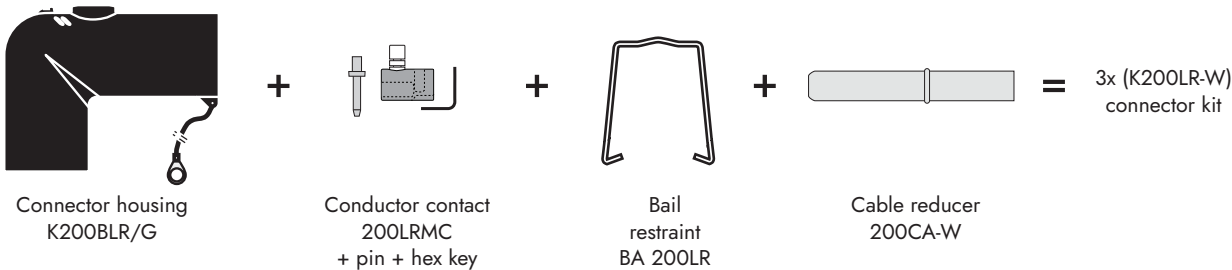

ORDERING INSTRUCTIONS

To order a kit of 3 elbow connectors, specify the type:

- for 12 kV applications: 3x (K200LR-12).
- for 17.5 kV applications: 3x (K200LR-12) for 25 up to 50 mm².
3x (K200LR-16) for 50 up to 95 mm².
- for 24 kV applications: 3x (K200LR-16).


EXAMPLE:

The cable is 24 kV, 50 mm² compact stranded aluminium with a diameter over core insulation of 20.5 mm and copper screen wires.

Order 3x (K200LR-16) elbow connector kit.


OPTIONS

VOLTAGE DETECTION POINT

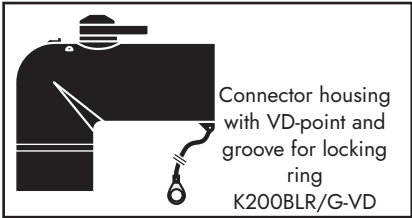


A version with a capacitive voltage divider (for voltage detection) and pre-moulded groove (for locking ring installation) is also available: add -VD to the specified type.

LARGER CONDUCTOR SIZES

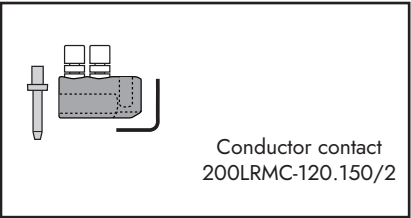


A version for larger conductor sizes (120 and 150 mm²) is also available.


Specify connector type	Current I _r (A)	Voltage U _m (kV)	Conductor sizes (mm ²)	Diameter over insulation
3x (K200LR-16-120.150)	250	12	120-150	17.5-25.0
3x (K200LR-19-120.150)	250	17.5-24	120-150	21.5-28.5



For use with copper wire screened cables. No earthing device is necessary.



For use with copper tape screened cables. Add -CT to order.



For use with Alupe or C 33-226 cables. Add -MT345 to order.



For use on vessels classed by DNV. Add -DNV to part number



For use with other cable types. Please contact our representative.



All kits are suitable for use indoor and outdoor.



PEP eco passport available

200SR

APPLICATION

Separable straight connector designed to connect polymeric insulated cable to equipment (transformers, switchgear, motors...).

DESIGN

Separable connector comprising:

1. Conductive EPDM insert.
2. Conductive EPDM jacket.
3. Insulating EPDM layer.
4. Type A interface as described by CENELEC EN 50180 and 50181.
5. Conductor contact.
6. Earthing lead.
7. Cable reducer.

The screen break design enables cable outer sheath testing without removing or dismantling the connector.


SPECIFICATIONS AND STANDARDS

The 200SR separable connector meets the requirements of CENELEC HD 629.1.

TECHNICAL CHARACTERISTICS

- The thick conductive EPDM jacket provides a total safe to touch screen which ensures safety for personnel.
- Each separable connector is tested for AC withstand and partial discharge prior to leaving the factory.

INTERFACE A STRAIGHT CONNECTOR

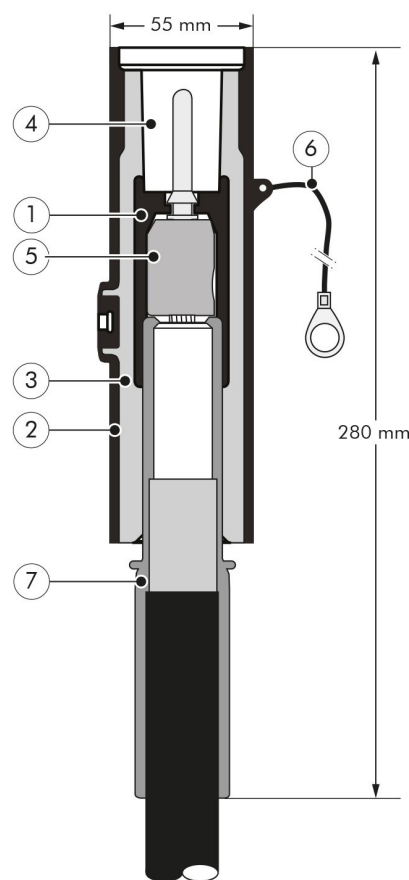

6/10 (12) kV
6.35/11 (12) kV
8.7/15 (17.5) kV
12/20 (24) kV
12.7/22 (24) kV

Up to 24 kV
250 A


EUROMOLD®

Separable connector type	Current I _r (A)	Voltage U _m (kV)	Conductor sizes (mm ²)		Diameter over insulation (mm)	
			min	max	min	max
K200SR-12	250	12 17.5	25 25	95 50	13.0	21.0
K200SR-16	250	17.5 24	50 25	95 95	17.5	25.0

KIT CONTENTS

The complete K200SR straight connector kit comprises 3x the following components:

The kit also comprises silicone grease, water sealing mastic, gloves, wipers, adhesive tape and installation instructions.

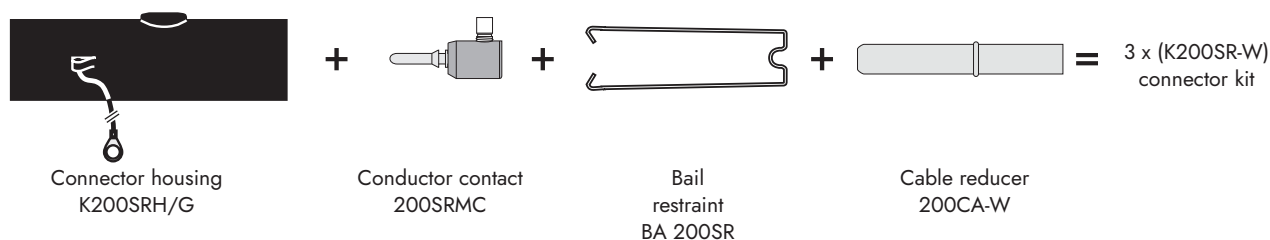

ORDERING INSTRUCTIONS

To order a kit of 3 straight connectors, specify the type:


- for 12 kV applications: 3x (K200SR-12).
- for 17.5 kV applications: 3x (K200SR-12) for 25 up to 50 mm².
3x (K200SR-16) for 50 up to 95 mm².
- for 24 kV applications: 3x (K200SR-16).

EXAMPLE:

The cable is 24 kV, 50 mm² compact stranded aluminium with a diameter over core insulation of 20.5 mm and copper screen wires.


Order 3x (K200SR-16) straight connector kit.

OPTIONS

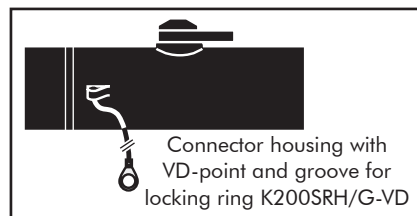


A version with a capacitive voltage divider (for voltage detection) and pre-moulded groove (for locking ring installation) is also available: add -VD to the specified type.

LARGER CONDUCTOR SIZES

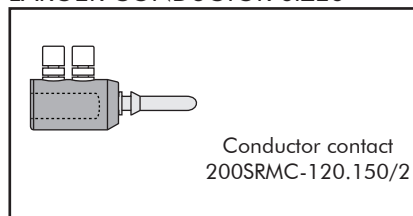


A version for larger conductor sizes (120 and 150 mm²) is also available.


Specify connector type	Current I _r (A)	Voltage U _m (kV)	Conductor sizes (mm ²)	Diameter over insulation
3x (K200SR-16-120.150)	250	12	120-150	17.5-25.0
3x (K200SR-19-120.150)	250	17.5-24	120-150	21.5-28.5



For use with copper wire screened cables. No earthing device is necessary.



For use with copper tape screened cables. Add -CT to order.



For use with Alupe or C 33-226 cables. Add -MT345 to order.



For use on vessels classed by DNV. Add -DNV to part number.



For use with other cable types. Please contact our representative.



All kits are suitable for use indoor and outdoor.



PEP eco passport available

240TS

APPLICATION

Separable tee shape connector designed to connect polymeric insulated cable to equipment (transformers, switchgear, motors, ...).

The standardized type C interface at the back side allows for the installation of a voltage sensor.

TECHNICAL CHARACTERISTICS

- A thick conductive EPDM jacket provides a total safe to touch screen.
- Each separable connector is tested for AC withstand and partial discharge prior to leaving the factory.


INTERFACE A SMART TEE CONNECTOR



DESIGN

Separable connector comprising:

1. Conductive EPDM insert.
2. Conductive EPDM jacket.
3. Insulating EPDM layer moulded between the insert and the jacket.
4. Type A interface as described by CENELEC EN 50180 and 50181.
5. Conductor contact.
6. Type C interface as described by CENELEC EN 50180 and 50181, suitable for voltage sensor.
7. Cable reducer.
8. Contact pin.
9. Clamping screw + flange nut.
10. Earthing lead.
11. Voltage sensor (optional supply).

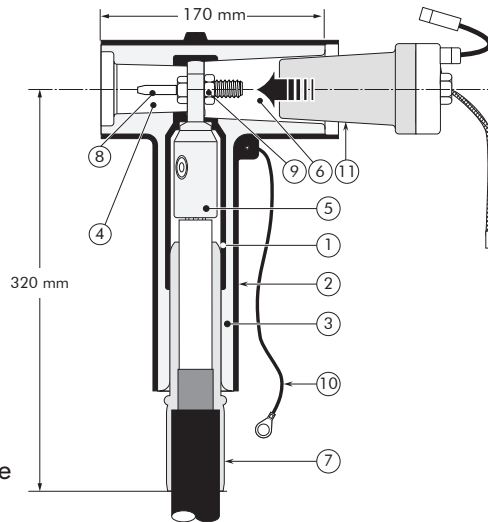

6/10 (12) kV
6.35/11 (12) kV
8.7/15 (17.5) kV
12/20 (24) kV
12.7/22 (24) kV

Up to 24 kV
250 A

EUROMOLD®

The screen break design enables cable outer sheath testing without removing or dismantling the connector.


SPECIFICATIONS AND STANDARDS

The 240TS separable connector meets the requirements of CENELEC HD 629.1.

Separable connector type	Voltage U_m (kV)	Current I_r (A)	Conductor sizes (mm ²)	
			min	max
K240TS/G	24	250	16	300

KIT CONTENTS

The complete K240TS/G tee connector kit comprises 3 x the following components:

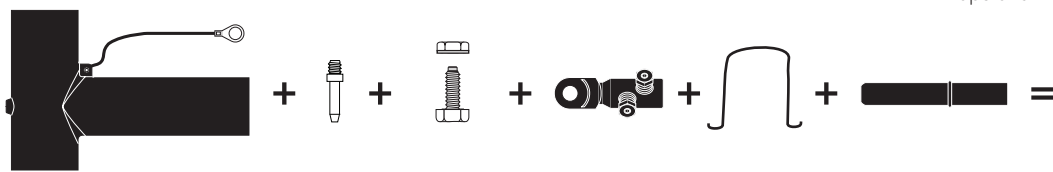

The kit also comprises silicone grease, installation cone, gloves, wipers, roll adhesive tape and installation instructions.

Connector housing
K240TS/G

Contact
pin

240TCS
clamping
screw +
flange nut

Conductor
contact TMBC-**X**

Bail restraint

Cable reducer
CA0-**W**

3 x K240TS/G-**W-X**
connector kit

ORDERING INSTRUCTIONS

To order the correct tee connector kit, select the ordering part number from table W which gives you the best centring of your core insulation diameter and substitute **X** using table X, according to your conductor size and type.

EXAMPLE:
The cable is 24 kV (Um), 50 mm² compact stranded copper with a diameter over core insulation of 20.5 mm.
Order 3 x K240TS/G-015-16.95UN5 tee connector kit.

TABLE W

Ordering part number	Dia. over core insulation (mm)	
	min	max
3 x 240TS/G-011- X	12.0	19.0
3 x 240TS/G-015- X	16.0	26.5
3 x 240TS/G-018- X	19.0	32.6
3 x 240TS/G-021- X	22.0	34.6
3 x 240TS/G-027- X	28.5	37.5

TABLE X




Conductor sizes (mm ²)	Aluminium and copper conductor	
	Bolted	
16 25 35 50 70 95 120 150 185 240 300	16.95UN5	
		95.300UN5

OPTIONS

The 240TS can be used with standardized Interface C voltage sensors. A selection of such sensors is available from Nexans:

- For Zelisko voltage sensor SMVS-UW1001, add +**UW1001** to the order reference.
- For ABB voltage sensor KEVA24 C10 or KEVA 24 C10c (with conductive surface), add +**KEVA 24 C10(c)** to the order reference.

The 240TS can also be used as a regular tee connector to connect MV cable to MV equipment. For such applications, the rear interface must be sealed with an insulating plug (incl. cap). Add +**400BIPA** to the order reference.

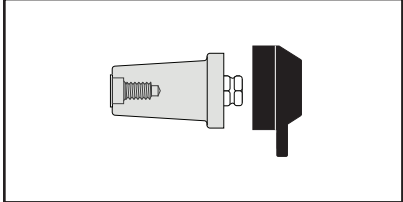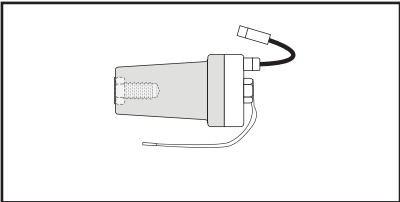

For use with copper tape screened cables.
Order: Kit MT.



For applications outdoors and in humid climate.
Order: +MWS.



180AR-1/2/3

APPLICATION

For use in equipment insulated with oil fluid, typically for transformers, switchgear, capacitors...

TECHNICAL CHARACTERISTICS

Each bushing is tested for AC withstand and partial discharge prior to leaving the factory.

DESIGN

- The equipment bushings are moulded epoxy insulated parts in accordance with CENELEC EN 50180.
- The 180AR-2 bushing has a length B outside this standard.
- The standard bushings, (K)180AR-1 /-2 /-3, are equipped with 6 tabs for the bail restraint.
- The (K)180AR-1-G and (K)180AR-3-G are equipped with 4 tabs and 2 threaded inserts M6 (-G version).

ORDERING INSTRUCTIONS

To order the equipment bushing, specify the type.


The bushings are supplied with an earth jumper (/J) or an earth plate (/GS). This earth connection must be specified when ordering.

E.g. K180AR-1/J.


SPECIFICATIONS AND STANDARDS

The plug-in type equipment bushings 180AR... meet the requirements of CENELEC EN 50180 and IEC 60137.

Type 180AR-1 /-2 /-3

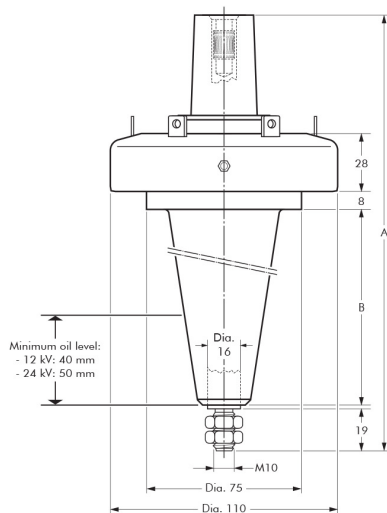

Type 180AR-1-G /-3-G



INTERFACE A1 EQUIPMENT BUSHINGS



6/10 (12) kV
6.35/11 (12) kV
8.7/15 (17.5) kV
12/20 (24) kV
12.7/22 (24) kV

Up to 24 kV - 250 A

EUROMOLD®


In mm.

Equipment bushing type	Voltage Um (kV)	Current Ir (A)	Dimensions (mm)	
			A	B
180AR-1	12	250	222	106
K180AR-1	24	250	222	106
180AR-2	12	250	284	168
K180AR-2	24	250	284	168
180AR-3	12	250	173	55
K180AR-3	24	250	173	55

FIXINGS FOR EQUIPMENT BUSHINGS

180AR-1/GS
180AR-1-G/GS
180AR-2/GS
180AR-3/GS AND
180AR-3-G/GS BUSHINGS

180AR-1/J
180AR-1-G/J
180AR-2/J
180AR-3/J AND
180AR-3-G/J BUSHINGS

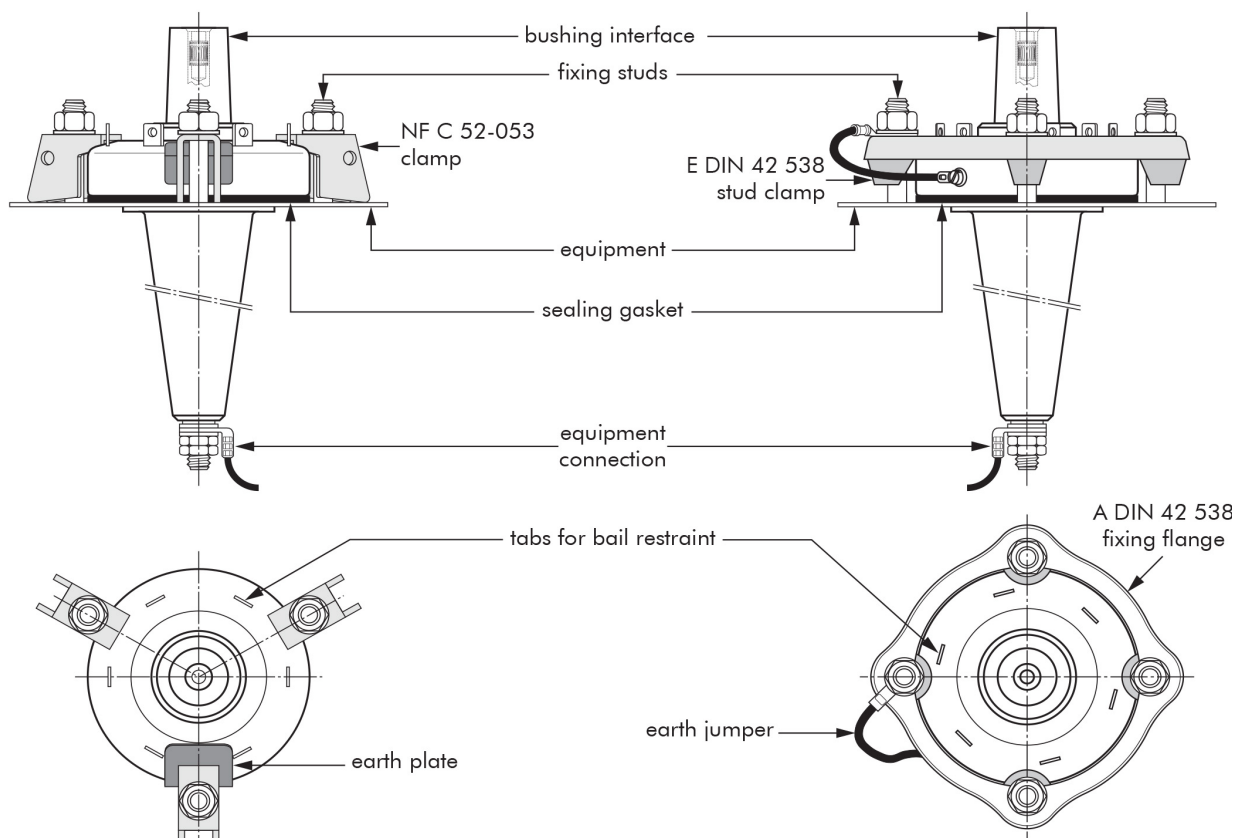

BUSHING CLAMPING KIT

To order the bushing clamping kit, according to NF C 52-053 standards, simply specify: KBC – NFC 52-053 /200 SERIES.

Contents: - 3 x claw clamp NF
- 1 x sealing gasket.


BUSHING CLAMPING KIT

To order the bushing clamping kit, according to DIN 42 538 standards, simply specify: KBC - RING CLAMP 1.

Contents: - 1 x fixing flange A
- 4 x stud clamp E
- 1 x sealing gasket.


FIXING DIMENSIONS STANDARDS NF C 52-053

French standards.

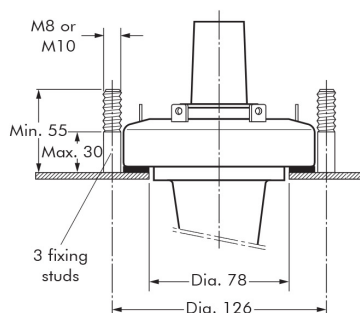

FIXING DIMENSIONS STANDARDS DIN 42 538

German standards.

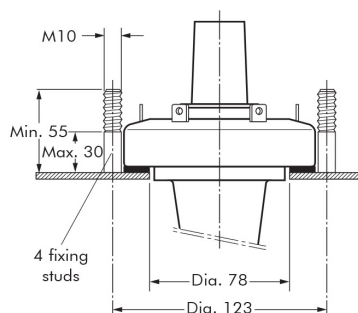

In mm.



180A-24P-O

INTERFACE A1 IN-AIR BUSHING

APPLICATION

For use in equipment insulated with air, typically for dry type transformers, motors, switchgear, capacitors...

TECHNICAL CHARACTERISTICS

Each bushing is tested for AC withstand and partial discharge prior to leaving the factory.

SPECIFICATIONS AND STANDARDS

The plug-in type equipment bushings 180A-24P-O are moulded epoxy insulated parts and meet the requirements of CENELEC EN 50181, IEC 60071 and IEC 60137.


ORDERING INSTRUCTIONS

To order the equipment bushing, specify the type.
The bushings are supplied with an earth jumper.

To include the ring clamp, add:

- /B, if per British standards
- /D, if per German standards
- /F, if per French standards.

E.g. 180A-24P-O/F.

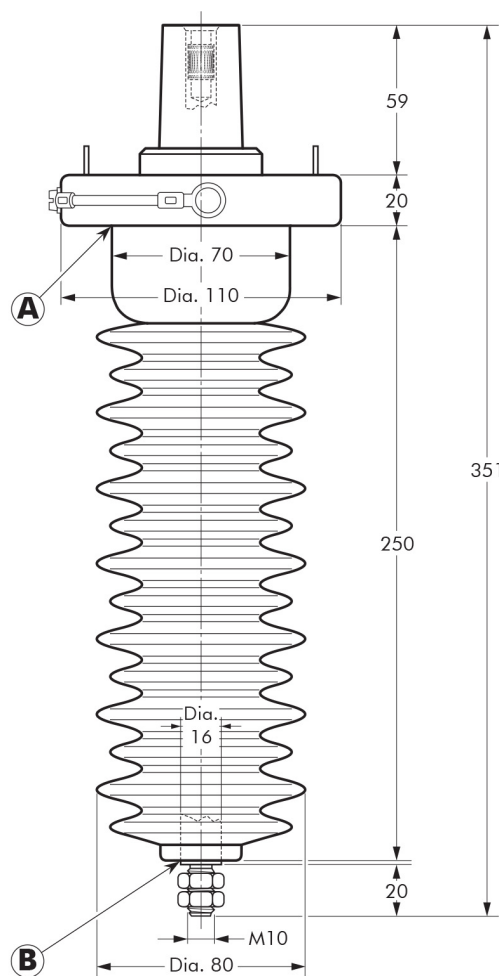

6/10 (12) kV
6.35/11 (12) kV
8.7/15 (17.5) kV
12/20 (24) kV
12.7/22 (24) kV


Up to 24 kV - 250 A

EUROMOLD®

Equipment bushing type	Voltage Um (kV)	Current Ir (A)	Creepage distance A-B (mm)
180A-24P-O	12	250	630
180A-24P-O	24	250	630


FIXINGS FOR EQUIPMENT BUSHINGS

180A-24P-O IN-AIR BUSHING

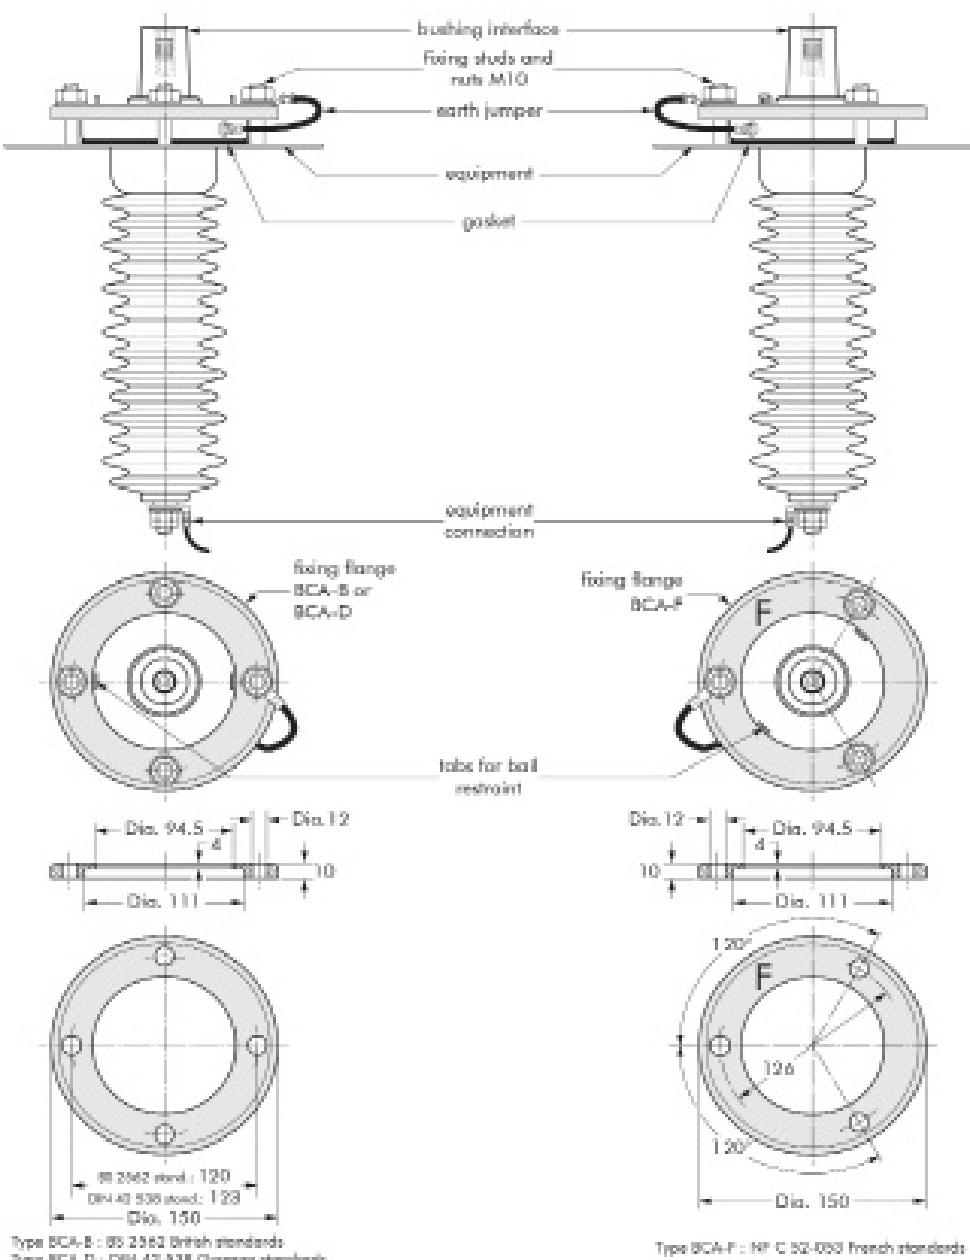


FIXING DIMENSIONS STANDARDS DIN 42 538

German standards.



FIXING DIMENSIONS STANDARDS NF C 52-053

French standards.



PITO-E

APPLICATION

- Separable termination designed to connect overhead lines or bus bars to equipment.
- Is suitable for indoor and outdoor use for medium polluted atmosphere.

DESIGN

The plug-in termination is a moulded epoxy insulated part. It meets the type A - 250 A interface as described in CENELEC EN 50180 and 50181.

SPECIFICATIONS AND STANDARDS

The separable termination PITO-E meets the requirements of IEC 60137.


ORDERING INSTRUCTIONS

To order the plug-in termination for 12 or 24 kV, specify PITO-E. The kit includes the bail restraint (for fixing onto the bushing) and 2 brass nuts (for top connection).

TECHNICAL CHARACTERISTICS

Each plug-in termination is tested for AC withstand prior to leaving the factory.

PLUG-IN TERMINATION

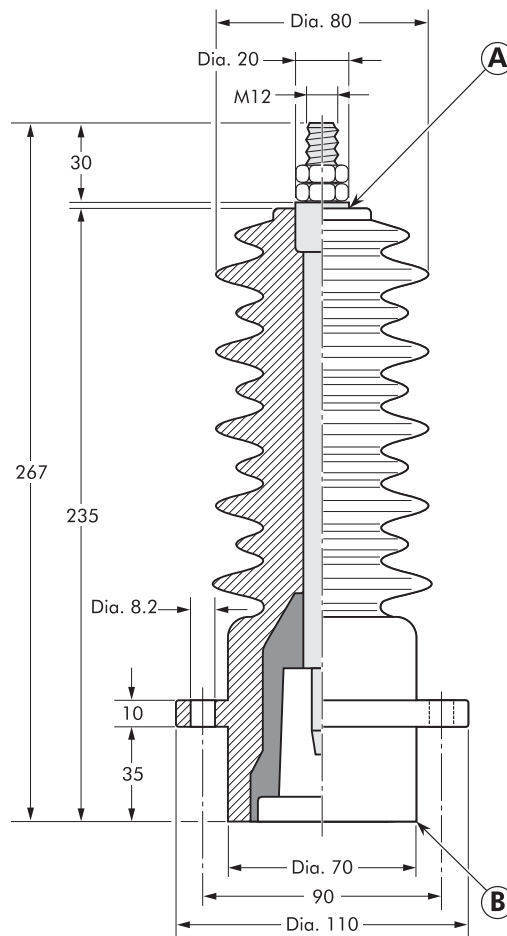

6/10 (12) kV
6.35/11 (12) kV
8.7/15 (17.5) kV
12/20 (24) kV
12.7/22 (24) kV

Up to 24 kV - 250 A

EUROMOLD®

In mm.

Plug-in termination type	Voltage U_r (kV)	Current I_r (A)	Creepage distance A-B (mm)
PITO-E	12	250	510
PITO-E	24	250	510

ACCESSORIES

APPLICATION

For use with connectors and bushings with an interface A as described by CENELEC EN 50180 and 50181.

TECHNICAL CHARACTERISTICS

All these products, except the earthing plug, are tested for AC withstand and partial discharge prior to leaving the factory.

6/10 (12) kV
6.35/11 (12) kV
8.7/15 (17.5) kV
12/20 (24) kV
12.7/22 (24) kV


Up to 24 kV

EUROMOLD®

K200DR DEAD-END RECEPTACLE

Fits over a bushing with a type A interface to provide 'dead-end' facility.

Renders the assembly watertight.



ORDERING INSTRUCTIONS

Order
K200DR/G for 12 kV or 24 kV applications.
The dead-end receptacle is supplied with an earth lead and standard bail BA 200LR.

K150DP DEAD-END PLUG

Plugs into connectors or receptacles to provide 'dead-end' facility.

Renders the assembly watertight.




ORDERING INSTRUCTIONS

Order
K150DP for 12 kV or 24 kV applications.

K151SOP STAND-OFF PLUG

Is designed to support and 'dead-end' connectors with a type A interface when removed from equipment.




ORDERING INSTRUCTIONS

Order
K151SOP for 12 kV or 24 kV applications.

250GP EARTHING PLUG

Is designed to support and earth connectors with a type A interface when removed from equipment.




ORDERING INSTRUCTIONS

Order
250GP for 12 kV or 24 kV applications.

200T SEPARABLE TEE CONNECTOR

Is designed to connect three cables of the same or varying sizes or two cables to equipment.
For an adapted bail, please refer to the catalogue or contact our representative.

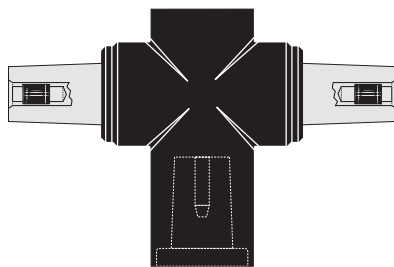


ORDERING INSTRUCTIONS

Order
200T for 12 kV or
K200T for 24 kV
applications.

200X SEPARABLE CROSS CONNECTOR

Is designed to connect four cables of the same or varying sizes or three cables to equipment.
For an adapted bail, please refer to the catalogue or contact our representative.

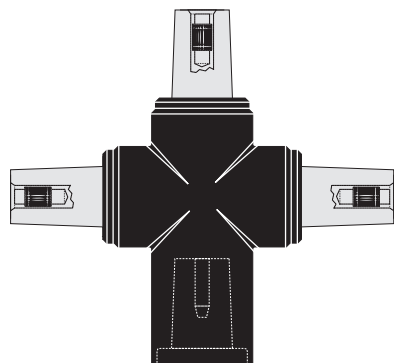

ORDERING INSTRUCTIONS

Order
200X for 12 kV or
K200X for 24 kV
applications.

K150S IN-LINE JUNCTION

Is designed to connect two cables of the same or varying sizes.
For an adapted bail, please refer to the catalogue or contact our representative.




ORDERING INSTRUCTIONS

Order
K150S for 12 kV or 24 kV
applications.

KAA4 SMART ADAPTER

Is designed for easy installation on MV/LV transformers, for new implantations or retrofitting, and requiring no cable modification.
To be used with Interface A separable connectors and equipment bushings.

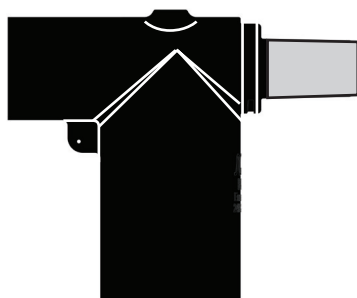


ORDERING INSTRUCTIONS

Order
KAA4 for 12 kV or 24 kV
applications.

KAA8 SMART ADAPTER

Is designed for easy installation on MV/LV transformers, for new implantations or retrofitting, and requiring no cable modification.
To be used with Interface A separable connectors and equipment bushings.

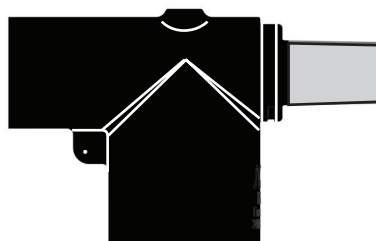

ORDERING INSTRUCTIONS

Order
KAA8 for 12 kV or 24 kV
applications.

Bail restraints

APPLICATION

For use with connectors, receptacles and bushings with an interface A as described by CENELEC EN 50180 and 50181.

ORDERING INSTRUCTIONS


The type of bail restraint is defined by its intended use with different types of connector, receptacle and/or bushing.

To order the bail restraint, specify the type needed.

STANDARD BAIL FOR 200LR BA 200LR

For use with:

1. 200LR elbow connector
2. an interface A equipment bushing

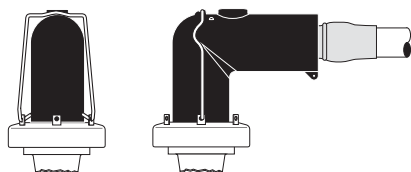


The complete K200LR elbow connector kit comprises 3 pieces of the standard bail BA 200LR.

STANDARD BAIL FOR 200SR BA 200SR

For use with:


1. 200SR straight connector
2. an interface A equipment bushing



The complete K200SR elbow connector kit comprises 3 pieces of the standard bail BA 200SR.

UNI-BAIL FOR 200LR


This universal bail offers a solution for bushings that are not compliant (cfr. deviating height of the "bushing tabs") with the bushing standard EN 50180. The height of the bail can be adjusted using the two wing-nuts.

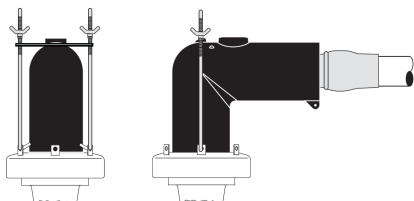

To order the 200LR uni-bail, simply specify:
3x(BA 200LR-UNI)

UNI-BAIL FOR 200SR

This universal bail offers a solution for bushings that are not compliant (cfr. deviating height of the "bushing tabs") with the bushing standard EN 50180. The height of the bail can be adjusted using the two wing-nuts.



To order the 200SR uni-bail, simply specify:
3x(BA 200SR-UNI)

POSSIBLE ARRANGEMENTS

BAIL SADDLE

Different cable arrangements are possible by using the BAIL SADDLE 200X/T.

The standard bails that are delivered in the kit with the 200LR elbow connectors, 200SR straight connector, 156SA surge arrester... are fitting in the tabs of the bail saddle. No extra or special bails are required.


APPLICATION

For use with 150S in-line junction, 200T separable tee connector and 200X separable cross connector.


ORDERING INSTRUCTIONS

Bail saddle 200X/T
Item nr 25690


200LR+150S+200LR

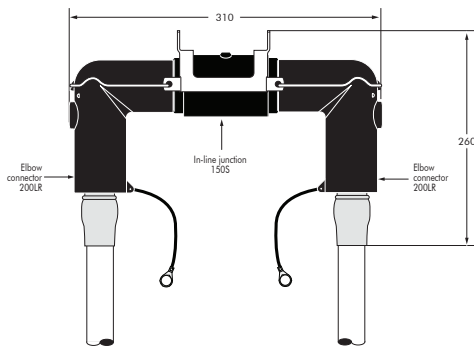


200SR+150S+200SR

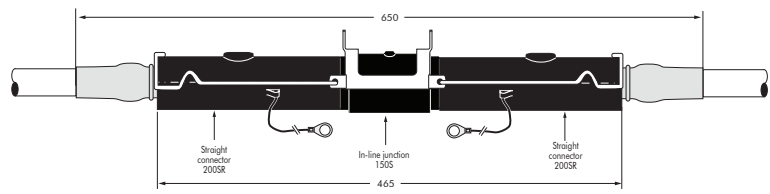


200LR+200T+156SA

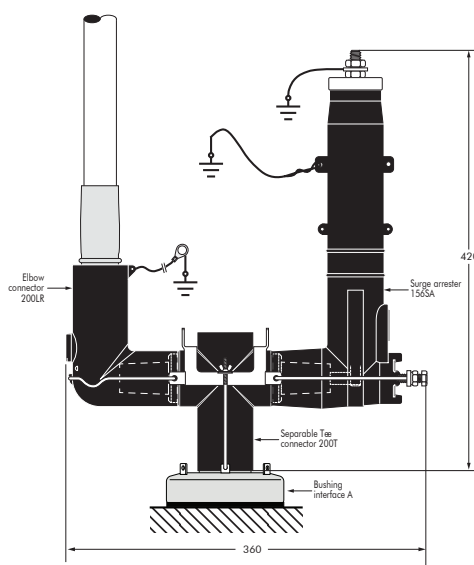


200SR+200T+200SR

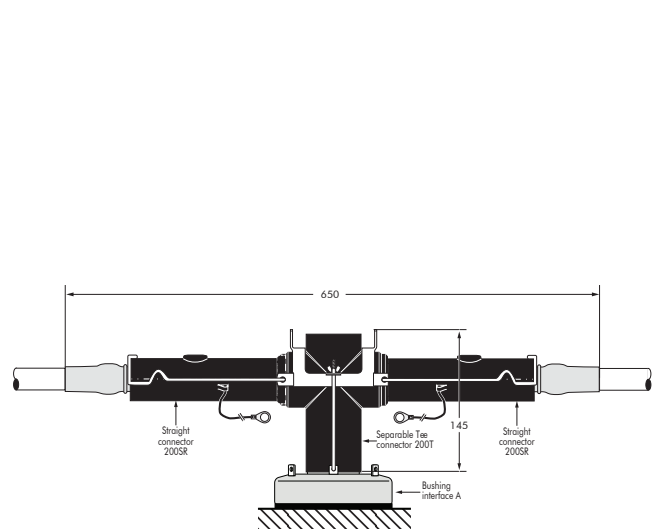


200LR+200SR+200X+200LR

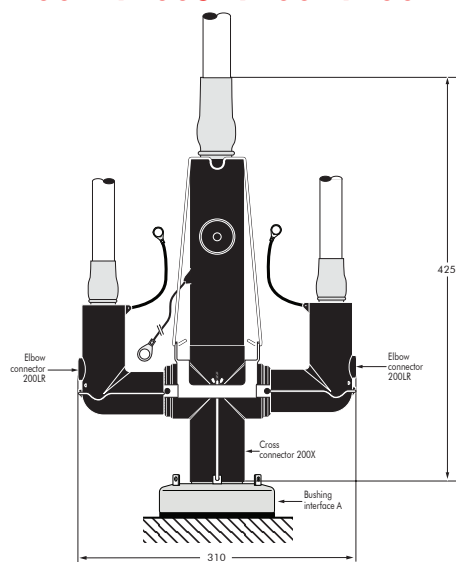

200SR+200LR+200X+200SR

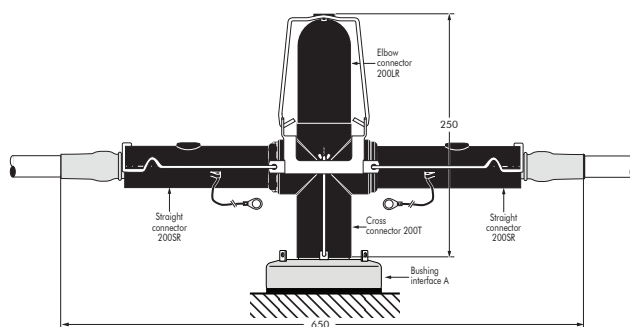

KAA8+800SA

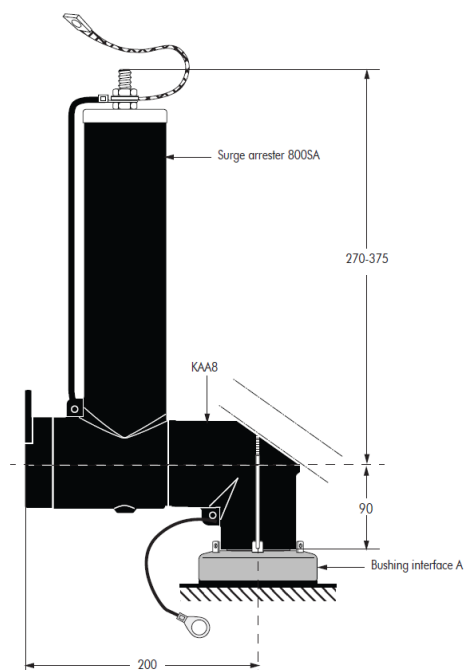

Other bail restraints

ORDERING INSTRUCTIONS

The type of bail restraint is defined by its intended use with different types of connector, receptacle and/or bushing.



To order the bail restraint, specify the type needed.

BAIL BEAM 150DP

item nr 21733

For use with:

1. (K)150DP dead-end plug
 2. (K)200LR elbow connector or (K)200SR straight connector
- (The standard bails in the connector kit are fitting the tabs of the bail beam)

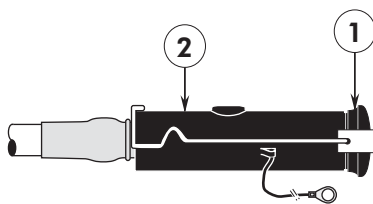

About Nexans

For over a century, Nexans has played a crucial role in the electrification of the planet and is committed to electrifying the future. With approximately 28,500 people in 41 countries, the Group is paving the way to a new world of safe, sustainable and decarbonized electricity that is accessible to everyone. In 2023, Nexans generated 6.5 billion euros in standard sales. The Group is a leader in the design and manufacturing of cable systems and services across four main business areas: Power Generation & Transmission, Distribution, Usage and Industry & Solutions. Nexans was the first company in its industry to create a Foundation supporting sustainable initiatives, bringing access to energy to disadvantaged communities worldwide. The Group is recognized on the CDP Climate Change A List as a global leader on climate action and has committed to Net-Zero emissions by 2050 aligned with the Science Based Targets initiative (SBTi).

Nexans. Electrify the future.

Nexans is listed on Euronext Paris, compartment A.

For more information, please visit www.nexans.com

Nexans Network Solutions NV - div. EUROMOLD

Nexans Network Solutions NV - div. EUROMOLD
Zuid III - Industrielaan 12
B-9320 EREMBODEGEM-AALST — BELGIUM
Tel: +32 (0)53/85 02 11
E-mail: sales.euromold@nexans.com
www.nexans.be/poweraccessories



Find out more about Nexans Power Accessories.

